

INSTALLATION MANUAL


HR-0500 EASY RELEASE



INSTALLATION

Before installation;

- Connect the H20 strong rope to a strongpoint on the deck or liferaft cradle with a shackle.
- Connect the liferaft lashing to the easy release wire loop and adjust so the lever will reach the strongpoint.

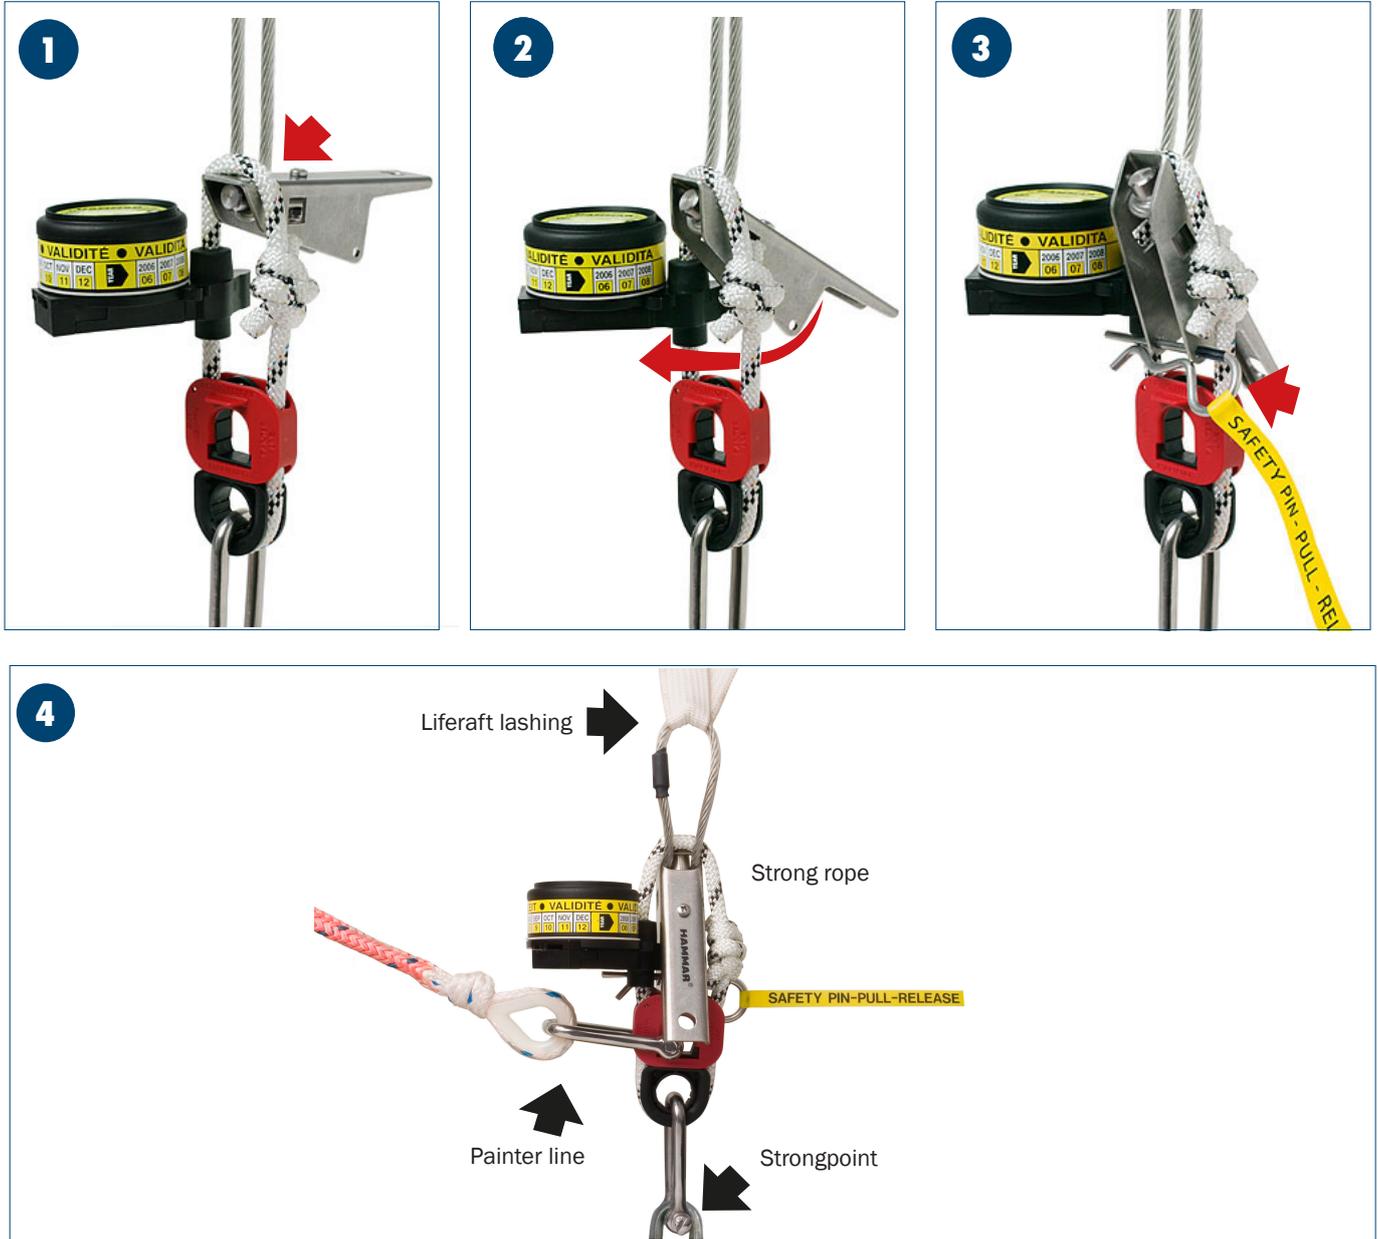

- 1** Remove the yellow thimble and insert the Easy Release lever and insert the tip of the easy release lever under the strong rope.
- 2** Pull down on the lever until the part with small holes is through the loop of the strong rope.
- 3** Insert the safety pin through the both holes as far as it will go.
- 4** Installation is now complete.